



RESIDENTIAL & LIGHT COMMERCIAL PRODUCT PORTFOLIO

RESIDENTIAL PRODUCT PORTFOLIO

Split



INDOOR UNITS

PAIR & MUTLI APPLICATION

| Type | Model | Product name | | 15 | 20 | 25 | 28 | 35 | 42 | 50 | 60 | 71 |
|--------------------------|--|------------------------|--|----|----|----|----|----|----|----|----|----|
| Ururu multi | Ururu multi | CTXU-G ¹ | | | | ■ | | ■ | ■ | ■ | | |
| | Ururu Sarara | FTXR-E | | | | | ■ | | ■ | ■ | | |
| Wall mounted | Daikin Emura | FTXG-J | | | | ■ | | ■ | | ■ | | |
| | Wall mounted unit | CTXS-K ¹ | | ■ | | | | ■ | | | | |
| | Wall mounted unit | FTXS-K | | | ■ | ■ | | | | | | |
| | Wall mounted unit | FTXS-J/G | | | ■ | ■ | | ■ | ■ | ■ | ■ | ■ |
| | Wall mounted unit | FTX-JV/GV ² | | | ■ | ■ | | ■ | | ■ | ■ | ■ |
| Ceiling mounted cassette | Slim concealed ceiling unit | FDXS-E/C | | | | ■ | | ■ | | ■ | ■ | |
| Floor standing | Nexura - floor standing unit with radiant heat panel | FVXG-K | | | | ■ | | ■ | | ■ | | |
| | Floor standing unit | FVXS-F | | | | ■ | | ■ | | ■ | | |
| Flexi type | Flexi type unit | FLXS-B ³ | | | | ■ | | ■ | | ■ | ■ | |

- 1) These indoor units can only be connected to multi outdoor units, pair application is not possible
- 2) 50,60,71 capacity classes cannot be connected to multi outdoor units
- 3) 60 capacity class is only connectable to multi outdoor units, pair application is not possible

OUTDOOR UNITS

PAIR & MUTLI APPLICATION

| Type | Model | Product name | | 20 | 25 | 28 | 35 | 40 | 42 | 50 | 52 | 60 | 68 | 71 | 80 | 90 | 100 | 125 | 140 | |
|------------|-----------|--|--|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|--|
| AIR COOLED | HEAT PUMP | RXR-E pair application | | | | ■ | | | ■ | ■ | | | | | | | | | | |
| | | RXG-K pair application | | | ■ | | ■ | | | ■ | ■ | | | | | | | | | |
| | | RXS-K/J/F pair application | | ■ | ■ | | ■ | | | ■ | ■ | | ■ | | ■ | | | | | |
| | | RX-JV/GV pair application | | ■ | ■ | | ■ | | | ■ | ■ | | ■ | | ■ | | | | | |
| | | RXLG-K pair application | | | ■ | | ■ | | | | | | | | | | | | | |
| | | RXL-J pair application | | ■ | ■ | | ■ | | | | | | | | | | | | | |
| AIR COOLED | HEAT PUMP | MXU-G Ururu multi | | | | | | ■ | | ■ | | | | | | | | | | |
| | | MXS-E ¹ multi model application | | | | | | | | | | ■ | | | | ■ | ■ | | | |
| | | MXS-H multi model application | | | | | | | ■ | | ■ | | | | | | | | | |
| | | MXS-K multi model application | | | | | | | | | | | | ■ | ■ | | | | | |
| | | MXS-G multi model application | | | | | | | | | | | | | ■ | ■ | | | | |
| | | MXS-F ¹ multi model application | | | | | | | | | | | | | | ■ | ■ | | | |
| | | RXYSQ-P8V1 VRV ^{III} -S heat pump for residential application | | | | | | | | | | | | | | | ■ | ■ | ■ | |



INDOOR UNITS PAIR, TWIN, TRIPLE & DOUBLE TWIN APPLICATION

| Type | Model | Product name | | 25 | 35 | 50 | 60 | 71 | 100 | 125 | 140 | 200 | 250 | Capacity (class) |
|--------------------------|--|----------------------|--|----|----|----|----|----|-----|-----|-----|-----|-----|------------------|
| CMSQ MULTI SYSTEM | Round flow ceiling mounted cassette | FMCQ-A8 ¹ | | | | | | | | | | | | |
| | Inverter driven concealed ceiling unit | FMDQ-B ¹ | | | | | | | | | | | | |
| CEILING MOUNTED CASSETTE | High COP, Round flow ceiling mounted cassette | FCQHG-F | | | | | | | | | | | | |
| | Round flow ceiling mounted cassette ⁴ | FCQG-F | | | | | | | | | | | | |
| | 4-way blow ceiling mounted cassette | FFQ-B9V | | | | | | | | | | | | |
| CONCEALED CEILING | Inverter driven concealed ceiling unit | FBQ-C8 ² | | | | | | | | | | | | |
| | Large concealed ceiling unit | FDQ-C | | | | | | | | | | | | |
| | Large concealed ceiling unit | FDQ-B ² | | | | | | | | | | | | |
| WALL MOUNTED | Wall mounted unit | FAQ-C | | | | | | | | | | | | |
| CEILING SUSPENDED | Ceiling suspended unit | FHQG-C | | | | | | | | | | | | |
| | Ceiling suspended unit | FHQ-B8 | | | | | | | | | | | | |
| | 4-way blow ceiling suspended unit | FUQ-B8 | | | | | | | | | | | | |
| FLOOR STANDING | Floor standing unit | FVQ-C | | | | | | | | | | | | |

1) Only use these indoor units in combination with Daikin's CMSQ Multi System - 2) Twin, triple, double twin application is only possible up to 125 class - 3) Only combination with RZQG



LIGHT COMMERCIAL PRODUCT PORTFOLIO



OUTDOORUNITS

PAIR, TWIN, TRIPLE & DOUBLE TWIN APPLICATION

| System | Type | Product name | | 71 | 100 | 125 | 140 | 200 | 250 | |
|------------|-----------|--------------------------------|--|-----------|-----|-----|-----|-----------|-----|--|
| AIR COOLED | HEAT PUMP | RZQG-L 7V1/L7Y1 Seasonal Smart | | [Red bar] | | | | | | |
| | | RZQSG-LV1/LY1 Seasonal Classic | | [Red bar] | | | | | | |
| | | RZQ-CY1 Super Inverter | | | | | | [Red bar] | | |
| | | CMSQ-A Multi sytem | | | | | | [Red bar] | | |

FOR CONNECTION WITH AIR HANDLING UNITS AND BIDDLE AIR CURTAIN


| System | Type | Product name | | 71 | 100 | 125 | 140 | 200 | 250 |
|------------|-----------|---------------------------------------|--|----|-----------|-----------|-----|-----------|-----|
| AIR COOLED | HEAT PUMP | ERQ-AV1 ¹ Condensing Units | | | [Red bar] | | | | |
| | | ERQ-AW1 ¹ Condensing Units | | | | [Red bar] | | [Red bar] | |

1) Only use the condensing units in combinations with an air handling unit.

| Type | Product name | | 0 | 200 | 600 | 800 | 1,000 | 1,500 | 2,000 | 4,000 | 6,000 | 8,000 |
|-------------------------------|--------------|--|---|-----|-----|-----|-------|-----------|-------|-------|-------|-------|
| ERQ AIR HANDLING APPLICATIONS | EKEXV-kit | | | | | | | [Red bar] | | | | |

| Type | Product name | |
|---|----------------------|--|
| BIDDLE STANDARD AIR CURTAIN (CA) FREE HANGING | CYQS150DK80 *BN/*SN | |
| BIDDLE STANDARD AIR CURTAIN (CA) CASSETTE | CYQS200DK100 *BN/*SN | |
| BIDDLE STANDARD AIR CURTAIN (CA) RECESSED | CYQS250DK140 *BN/*SN | |

BIDDLE STANDARD AIR CURTAIN RANGE

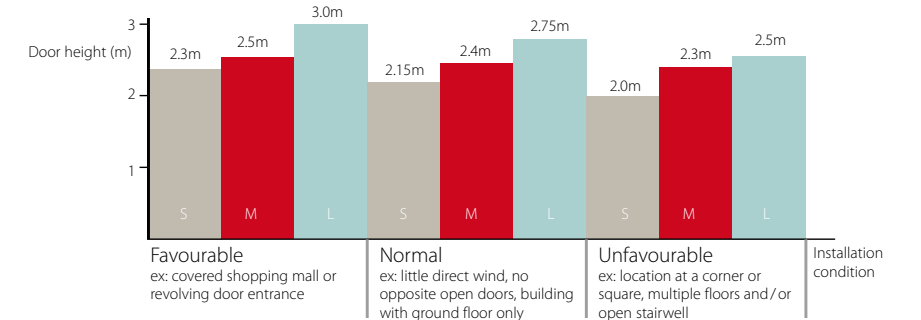

ROOFTOPS

| System | Type | Product name | Refrigerant | | 180 | 240 | 280 | 320 | 450 | 560 | 700 | 850 | 1000 | 1200 |
|------------|--------------|------------------------|-------------|--|-----------|-----|-----|-----|-----|-----|-----|-----------|------|------|
| AIR COOLED | COOLING ONLY | UATP-AY1 Rooftop Unit | R-407C | | [Red bar] | | | | | | | | | |
| | HEAT PUMP | UATYP-AY1 Rooftop Unit | R-407C | | | | | | | | | [Red bar] | | |

| System | Type | Product name | Refrigerant | | 250 | 350 | 450 | 550 | 600 | 700 |
|------------|-----------|------------------------|-------------|--|-----------|-----|-----|-----|-----|-----|
| AIR COOLED | HEAT PUMP | UATYQ-CY1 Rooftop unit | R-410A | | [Red bar] | | | | | |



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP) and Fan coil units (FCU). Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com

DAIKIN EUROPE N.V.

Naamloze Vennootschap
Zandvoordestraat 300
B-8400 Oostende, Belgium
www.daikin.eu
BE 0412 120 336
RPR Oostende

FSC-label plaatsen

Barcode plaatsen
ECPEN12-121